



Features

- Multi-facility code and reader technology support
- AES 128 bit data encryption
- Configurable auxiliary point control and monitoring
- HSPD-12/FIPS201 compliant
- UL 294 recognized
- Universal I/O device characterization

Benefits

- Affordable flexibility
- Reliably support a wide variety of sensors and control technologies
- Easy to install
- Supports OSDP, Wiegand, RS-485, magnetic stripe and keypads

Authentic Mercury MR serial Input/output (SIO) devices represent the secondary level in Mercury's distributed architecture. The devices offer flexibility for our OEM partners, ensuring they can choose the controller that best fits their needs.

The MR52 is a dual-card reader interface panel with on-board flexibility to connect to a wide range of security devices. The economical MR52 is easy to install and provides the necessary I/O for controlling two doors with auxiliary point control and monitoring – all in a single device.

Each high-performance unit can connect two card readers, eight general-purpose input monitor points and six control relays to any Authentic Mercury EP series intelligent controller.

With two-wire RS-485 connectivity, the MR52's two reader ports support OSDP, Wiegand, RS-485, and magnetic stripe readers. Keypads and integrated keypad readers are also supported. Hardware interface and card format settings are loaded through software commands.


The MR52 is an ideal choice for a versatile and reliable interface panel for two doors.

Application Notes

The inputs and the relays may be assigned to door-related functions or to general purpose I/O. The inputs support normally open, normally closed, supervised, and non-supervised circuits. End-of-line (EOL) resistance values are configurable, and the relays can be configured for fail-safe or fail secure operation.

When connected to an Authentic Mercury EP intelligent controller, the MR52 can relate the activities of selected system devices to other devices within the system, generating actions and allowing activities to occur independent of the host. The MR52 can also locally process access requests based on facility code verification, even when disconnected from an intelligent controller. Several facility codes may be active in each MR52.

Primary Power:	12-24 VDC +/- 10%, 550mA maximum 12Vdc @ 450mA nominal 24Vdc @ 270mA nominal	Inputs:	8 General purpose: Programmable circuit type 2 Dedicated: Tamper and Power Monitor
Communication:	RS-485, 2-wire, 4,000' (twisted pair with shield, Belden 9841)	Outputs:	6 Relays: Form-C, 5 Amp 28 Vdc
Reader Ports:	2 Reader Ports	Dimensions:	6.0' W x 8.0' L x 1.0' H, (152mm W x 203mm L x 25mm H)
Power:	12 Vdc regulated, 125mA each reader Data Card/Keypad Clock/Data, Data-1/ Data-0, or RS-485	Temperature:	0-70 °C operational, -55-85 °C storage
Keypad:	8-bit Mercury, 8-bit Dorado, 4-bit HID	Humidity:	0 to 95% RHNC
LED:	One-wire bi-color LED support, or two-wire	Standards:	UL 294 recognized CE compliant RoHS
Buzzer:	Only with 'one-wire' LED		

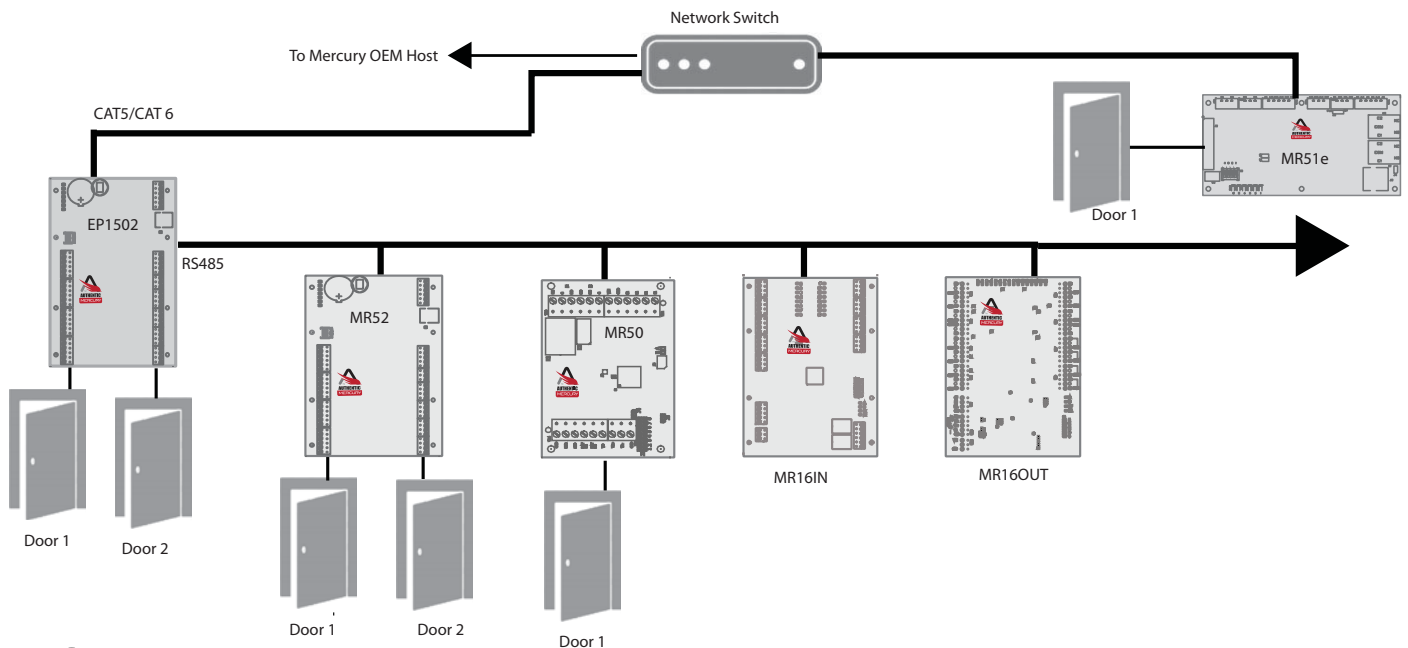

The Authentic Mercury open platform delivers quality assurance derived from the most proven and reliable hardware in the industry. Driven by our engineering excellence and technology leadership. Authentic Mercury hardware is designed as an access control platform that easily encompasses emerging technologies, changing industry standards and evolving system environments. Make yours Authentic, Make sure its Merc.